

### Haltech Off-Road Usage Policy

It is unlawful to tamper with your vehicle's emissions equipment.

Haltech products are designed and sold for sanctioned off-road/competition non-emissions controlled vehicles only. Using Haltech products for street/road use on public roads is prohibited by law. It is the responsibility of the installer and/or user of this product to ensure compliance with all applicable local and federal laws and regulations. Please check with your local vehicle authority before using any Haltech product

### Installation of Haltech Products

No responsibility whatsoever is accepted by Haltech for the fitment of Haltech Products. The onus is clearly on the installer to ensure that both their knowledge and the parts selected are correct for that particular application. Any damage to parts or consequential damage or costs resulting from the incorrect installation of Haltech products are totally the responsibility of the installer.

### Haltech Limited Warranty

Unless specified otherwise, Haltech warrants its products to be free from defects in material or workmanship for a period of 12 months from the date of purchase. Proof of purchase in the form of a copy of the original purchase invoice, receipt or bill of sale which indicates that the product is within the warranty period, must be presented to obtain warranty service. If the Haltech product is found to be defective as mentioned above, it will be replaced or repaired if returned prepaid along with proof of purchase. This shall constitute the sole liability of Haltech. To the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representations, either expressed or implied, including any implied warranty of merchantability or fitness. In no event shall Haltech, be liable for special or consequential damages.

### Product Returns

Please include a copy of the original purchase invoice, receipt or bill of sale along with the unused, undamaged product and its original packaging. Any product returned with missing accessory items or packaging will incur extra charges to return the item to a re-saleable condition. All product returns must be sent via a freight method with adequate tracking, insurance and proof of delivery services. Haltech will not be held responsible for product returns lost during transit. The sale of any sensor or accessory that is supplied in sealed packaging is strictly non-refundable if the sealed packaging has been opened or tampered with. This will be clearly noted on the product packaging. If you do not accept these terms please return the sensor in its original unopened packaging within 30 days for a full refund.

**Returning a sensor or accessory product within 30 days of purchase:** Product may be returned for credit or full refund. (Any sealed packaging must not have been opened or tampered with)

**Returning a sensor or accessory product after 30 days of purchase:** Product may be returned for credit only (no refunds given) and is subject to a 10% Restocking fee. (Any sealed packaging must not have been opened or tampered with)

Template #2




# HT-020402

## CO2 Boost Control Dual Solenoid Kit

Includes two 3 Port 1/8th NPT- 33Hz solenoids, 150 PSI "TI" Wastegate Pressure Sensor 1/8 NPT with -4 AN adaptor and 1/8th "T" Fitting

### CO2 Boost Control Dual Solenoid & Pressure Sensor Kit

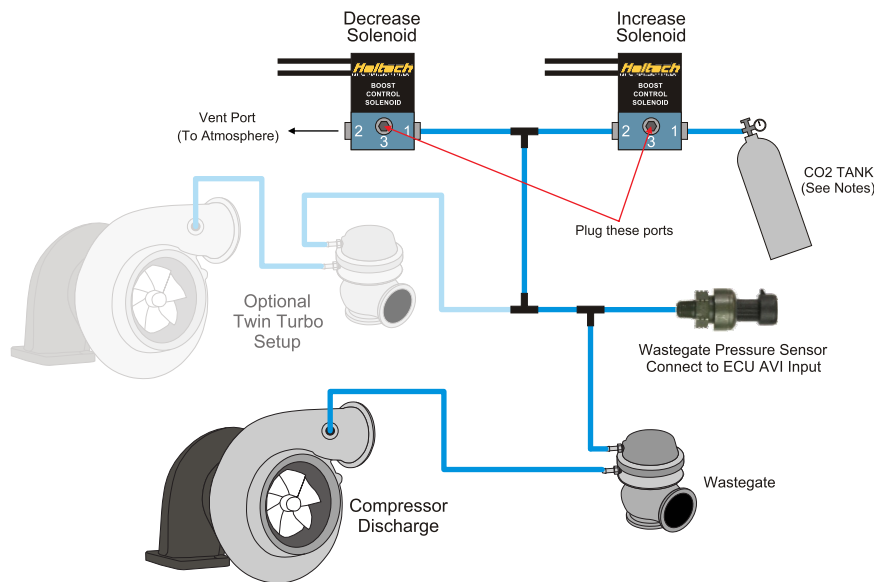

#### Notes:


- Recommended control frequency is 33Hz
- Requires Elite 1500/2500 ECU with 2.09.0 or newer Firmware.
- Regulate CO2 Supply pressure to 1.5-2x of wastegate target pressure.
- Wastegate Pressure Sensor range must exceed target manifold pressure range.

#### Solenoid Connection



Termination	
1	POWER (+12V SWITCHED)
2	HALTECH OUTPUT

\* This part is not polarity sensitive and can be wired in either orientation



- (1) Crimp Pin to wire and then
- (2) insert into harness side of Plug


#### Wastegate Pressure Sensor Connection



Termination	
A	GROUND
B	POWER (+5V)
C	SIGNAL

#### Use Haltech Calibration file:

Pressure - Haltech TI 150 PSI HT010904.cal



- (1) Feed wire through plug, (2) Crimp Pin to wire and then
- (3) Draw back into plug to lock

HT-020402



Revision #4

Intl: +61 2 9729 0999  
USA: +1 888 298 8116

www.haltech.com

Intl: support@haltech.com  
USA: usasupport@haltech.com

YouTube /Haltechecu

Facebook /HaltechEngineManagement