

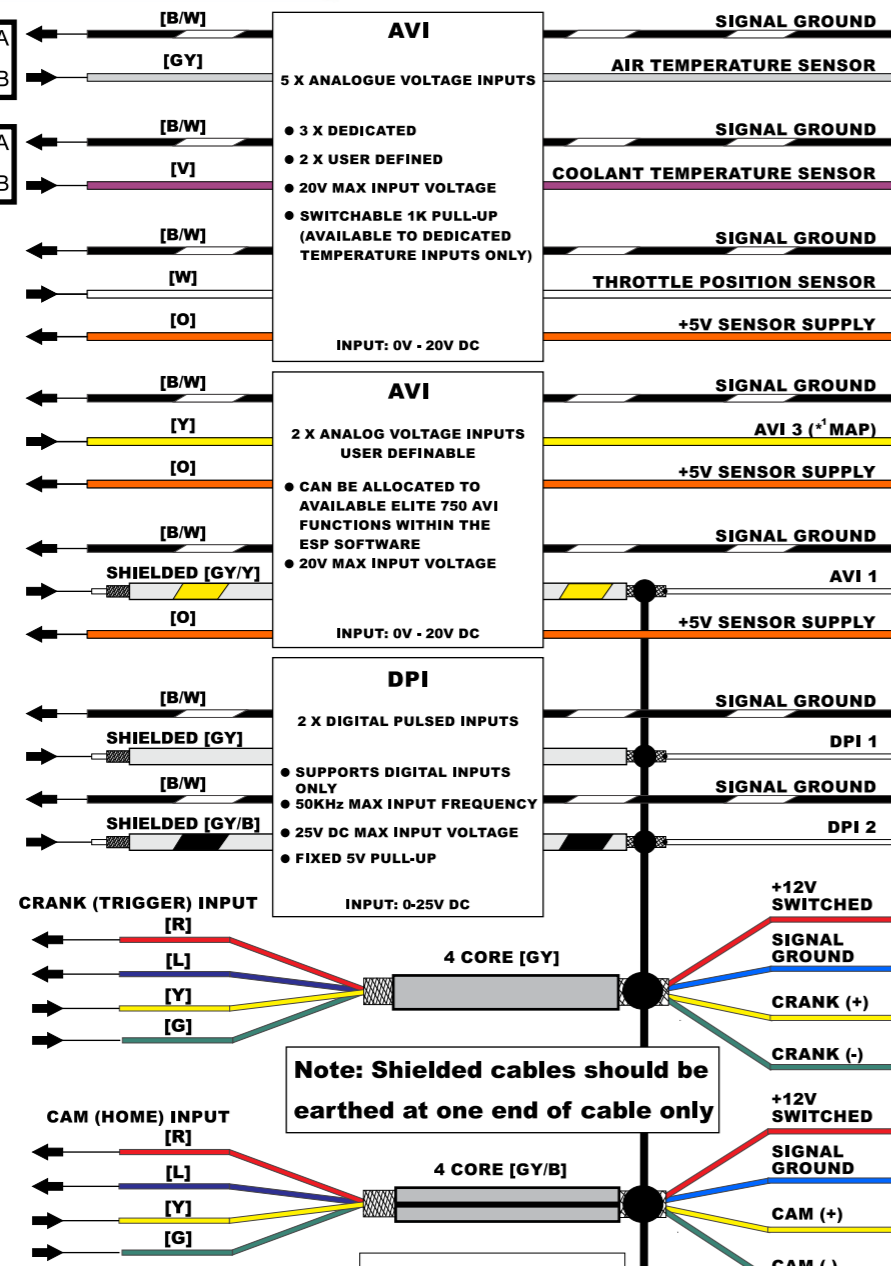


EXAMPLE CONNECTIONS


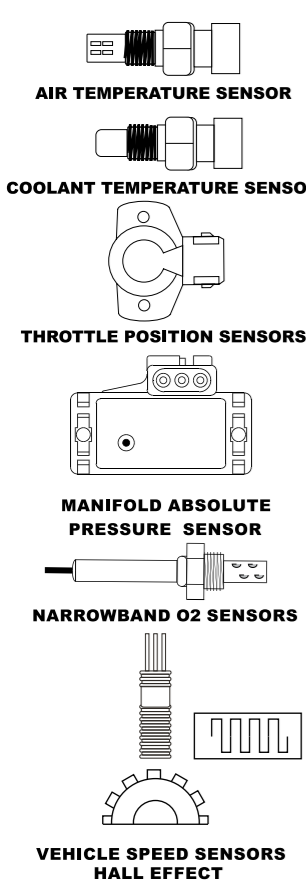


Note: Shielded cables should be earthed at one end of cable only





34 PIN CONNECTOR

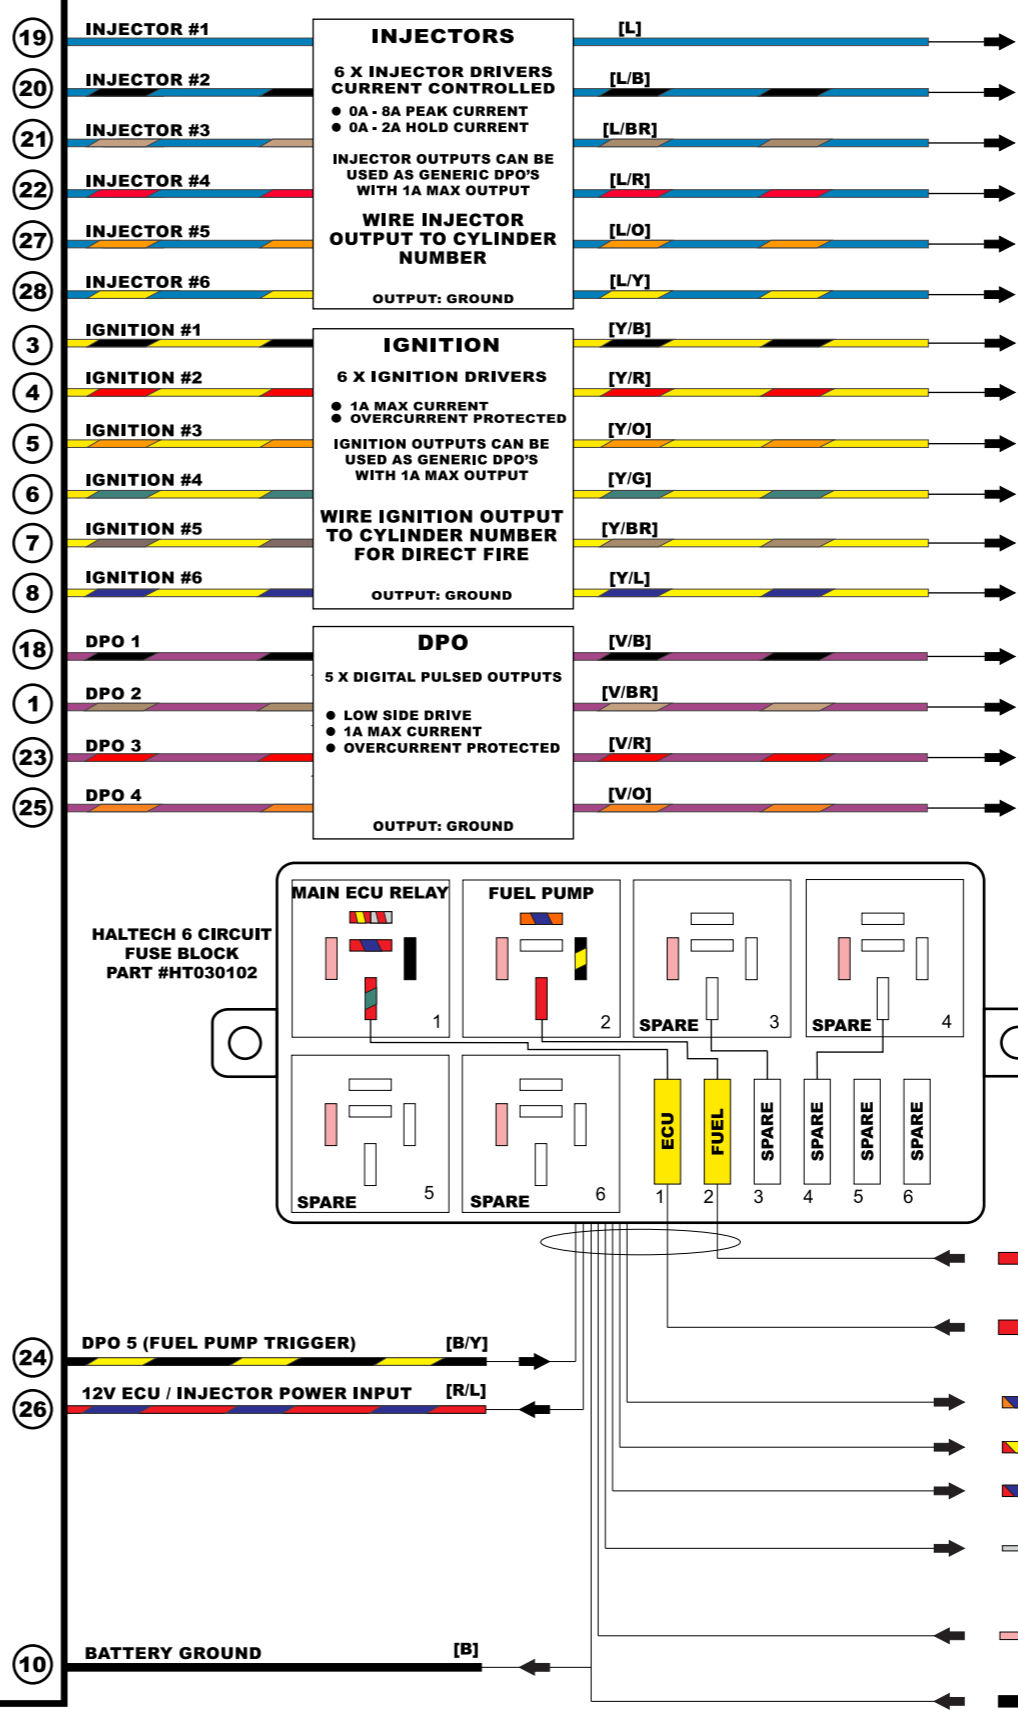

EXAMPLE CONNECTIONS

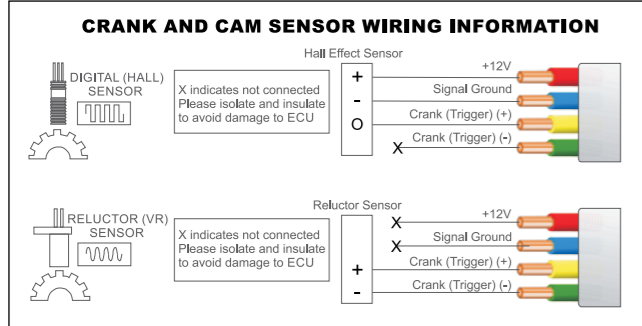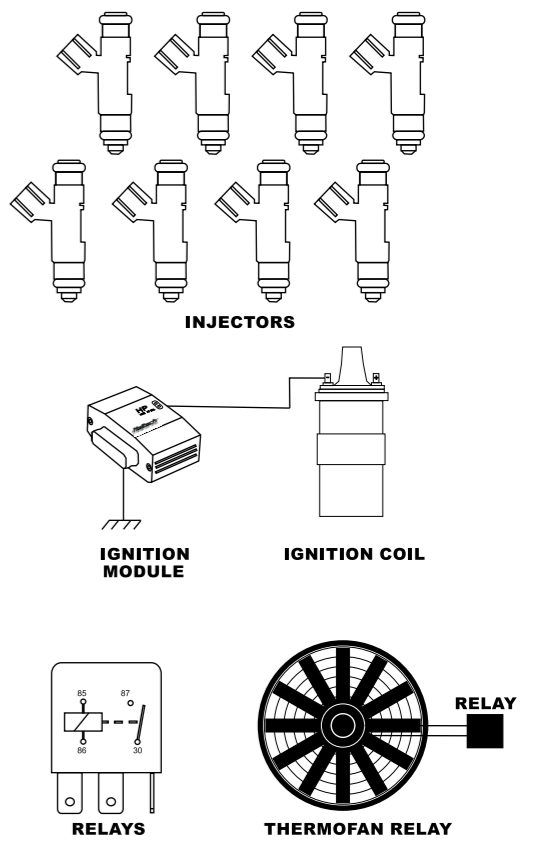

LOOKING INTO CONNECTOR ON ECU

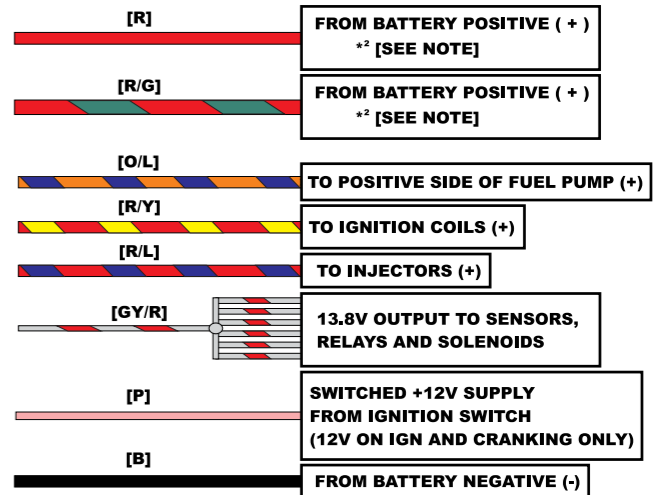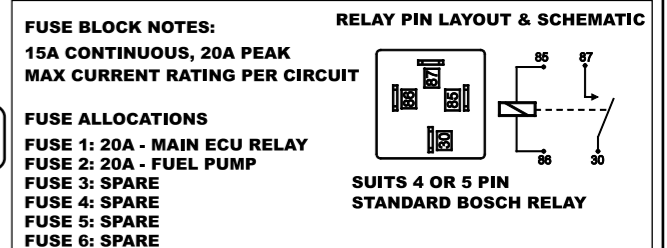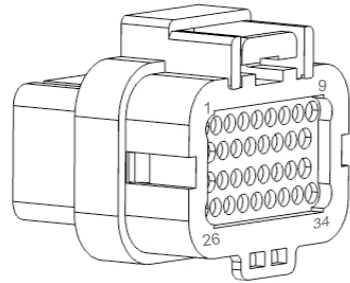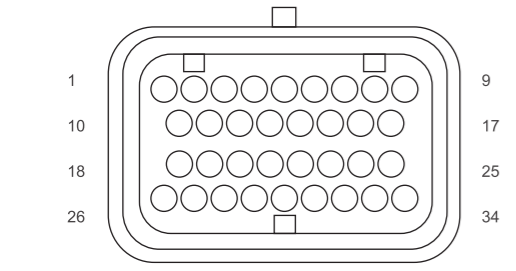

LEGEND - WIRE COLOUR

B = BLACK BR = BROWN G = GREEN GY = GREY L = BLUE
 O = ORANGE P = PINK R = RED V = VIOLET Y = YELLOW W = WHITE
 WHEN TWO COLOURS ARE USED IN A WIRE BY THE ALPHABETICAL CODE, THE FIRST LETTER INDICATES THE BASIC WIRE COLOUR, THE SECOND COLOUR INDICATES THE COLOUR OF THE STRIPE.

NOTES:

*1 RECOMMENDED FUNCTION ALLOCATION, BUT NOT LIMITED TO
 *2 CAN USE 75A CIRCUIT BREAKER